

Framing Techniques for Builders: Lessons Learned and Best Practices

**Gary Schweizer, PE
Weyerhaeuser
November 13, 2019**

***Disclaimer: This presentation was developed by Weyerhaeuser and is not funded by WoodWorks or the
Softwood Lumber Board.***

“The Wood Products Council” is a Registered Provider with The American Institute of Architects Continuing Education Systems (AIA/CES), Provider #G516.

Credit(s) earned on completion of this course will be reported to **AIA CES** for AIA members. Certificates of Completion for both AIA members and non-AIA members are available upon request.

This course is registered with **AIA CES** for continuing professional education. As such, it does not include content that may be deemed or construed to be an approval or endorsement by the AIA of any material of construction or any method or manner of handling, using, distributing, or dealing in any material or product.

Questions related to specific materials, methods, and services will be addressed at the conclusion of this presentation.



Course Description

Today's session is intended to improve framing techniques; addressing common commercial and multi-family construction issues. We will review several case studies and discuss the lessons learned so that similar issues are avoided on **your** projects.

This is an interactive discussion; questions and comments are welcomed.

Learning Objectives

1. Highlight framing issues and discuss solutions.
2. Discuss proper load path framing techniques.
3. Review lessons learned from different project case studies.
4. Examine construction strategies that result in high-performing structures.

A bit about me

Academics –

- BSCE - The Ohio State University
- MBA – The University of Dayton

Experience -

- Consulting Structural Engineer – Columbus, Ohio
- Wood Products/Structural Engineering – Trus Joist/Weyerhaeuser

Registered Professional Engineer/Structural Engineer

Expertise – Design & Analysis, Forensics, Litigation Support



Agenda - Lessons Learned

- **Load Path Resolution**
 - Vertical & Lateral
 - Lateral Stability
 - Differential Deflection
 - Unique Floor Requirements
- **Moisture Management**
 - Keep it Dry
 - Preservative Treatments
 - Protecting Products in Inventory & Jobsites
- **Vibration**
- **Fire & Sound Design**
- **Roof Anchors**

Load Path Resolution

Simply stated ... vertical and lateral loads need to be transferred to the foundation/ground.

Load rationalization =

Joist → Beam → Column → Foundation

- Proper member selection
- Adequate support
- Appropriate load transfer details
- Foundation adequacy

Software – 2d analysis; 3d view; review of software operator design



Load Path Resolution – “*What to watch for?*”

Vertical Loads

- Increased Dead Loads – lightweight concrete, tile or stone, non-load bearing walls
- Concentrated Loads (Fc perp or Fc parallel)
 - Beams & Headers
 - Girder Truss
- Construction Loading
- Wall and Post Load transfer
- Differential loading conditions

Lateral Loads

- Location of Shear Walls – connection design; fastener limitations)
- Blocking
- Screws vs. Nails

Installation Review




In other words - Sequence the Framing

Construction Loads – The Unforeseen



Wall and Post Load Transfer

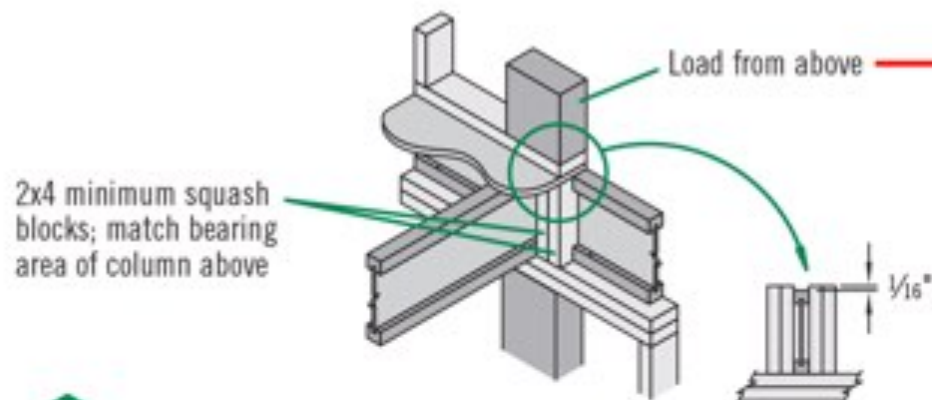


CS Use 2x4 minimum squash blocks to transfer load around TJI® joist

TJI® joist floor framing does not require bridging or mid-span blocking




DO NOT use sawn lumber for rim board or blocking as it may shrink after installation. Use only engineered lumber.

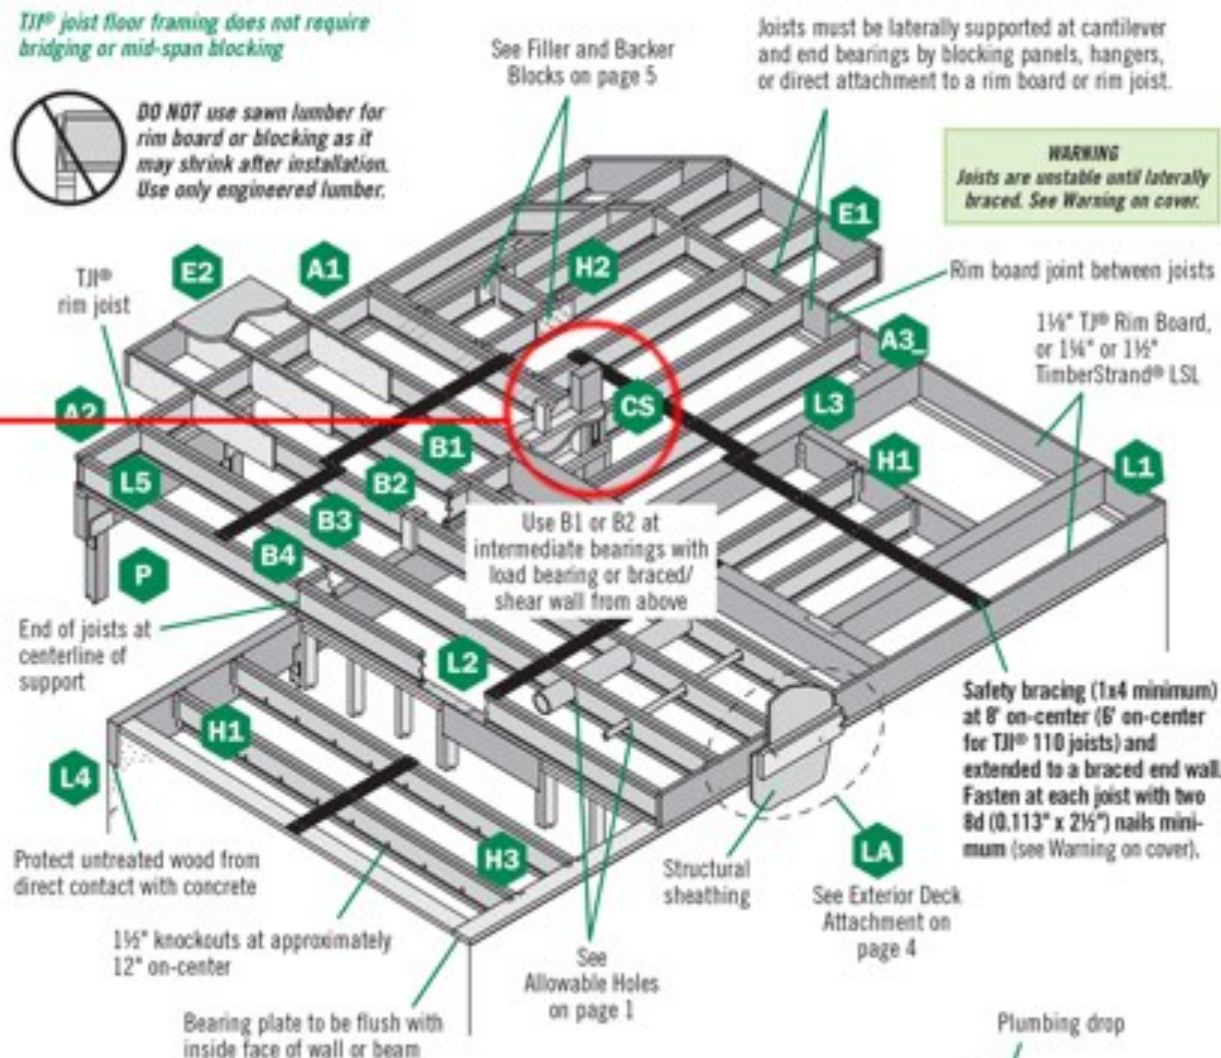

INSTALLATION TIPS

- Subfloor adhesive will improve floor performance, but may not be required.
- Squash blocks and blocking panels carry stacked vertical loads (details B1 and B2). Packing out the web of a TJI® joist (with web stiffeners) is not a substitute for squash blocks or blocking panels.
- When joists are doubled at non-load bearing parallel partitions, space joists apart the width of the wall for plumbing or HVAC.
- Additional joist at plumbing drop (see detail at right).



Joist may be shifted up to 3" if floor panel edge is supported and span rating is not exceeded. Do not cut joist flanges.

Additional joist is required if floor panel edge is unsupported or if span rating is exceeded.

Inadequate Load Transfer



Student Apartments

Complaint – Floor Levelness, Water Leaks

Construction Issue – Load Transfer (rim not bearing on masonry wall)

Squash Blocks added to Stabilize, floor jacked to level


What could the EOR/AOR have done better? – Load Transfer detailing

What could the suppliers have done better? – ‘Protocol’ communications

Differential Deflection

**Complaint –
Tile Cracking
Excessive Deflection
'dropping' 5/8" over 4'**



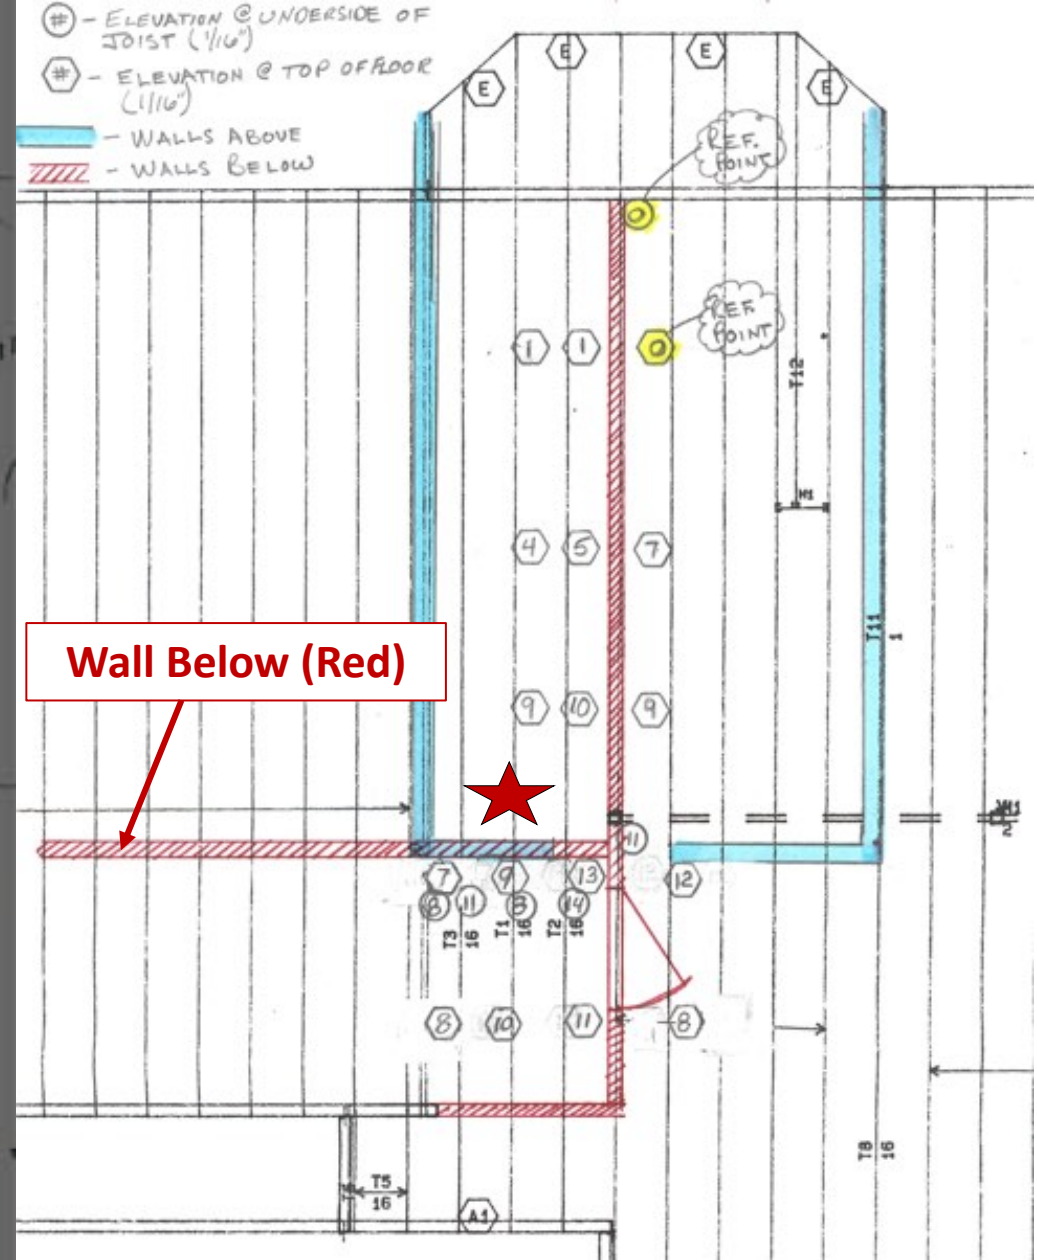



Wall Below (Red)

Differential Deflection

Field Investigation Results


Transit Floor Readings

- Potential for Differential Deflection
- Beam set too high!

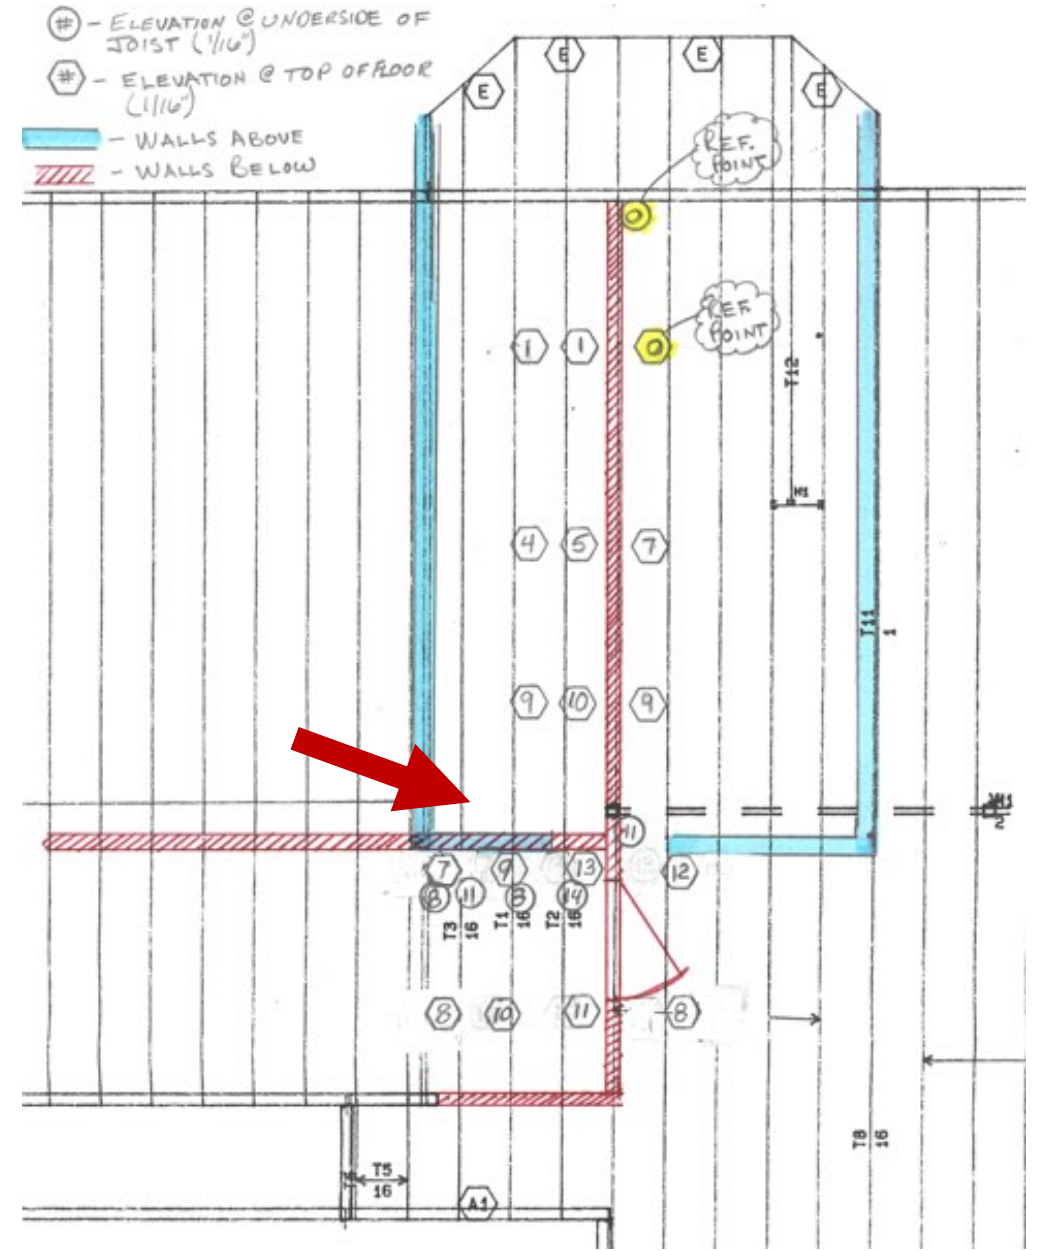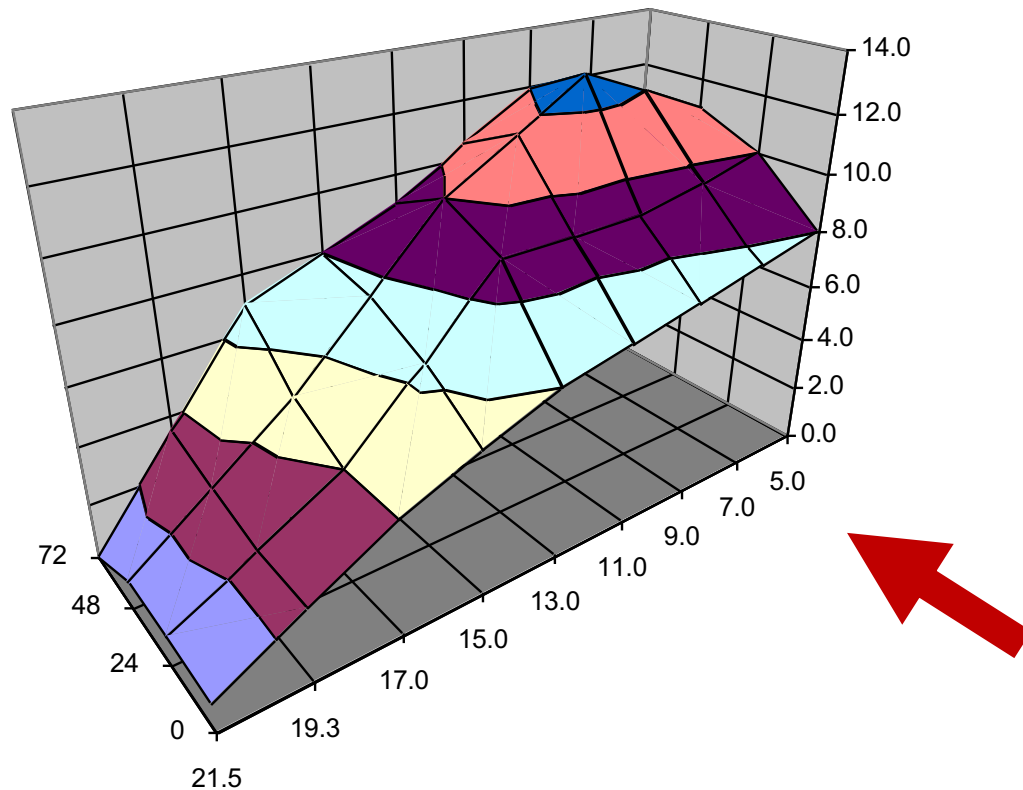

Best Practices - Differential Deflection

1. Anticipate different span and loading conditions
2. 'Feather framing' - simple vs. continuous span
3. Match deflection performance – beam vs adjacent joists
4. Acknowledge different support conditions (wall vs. beam)

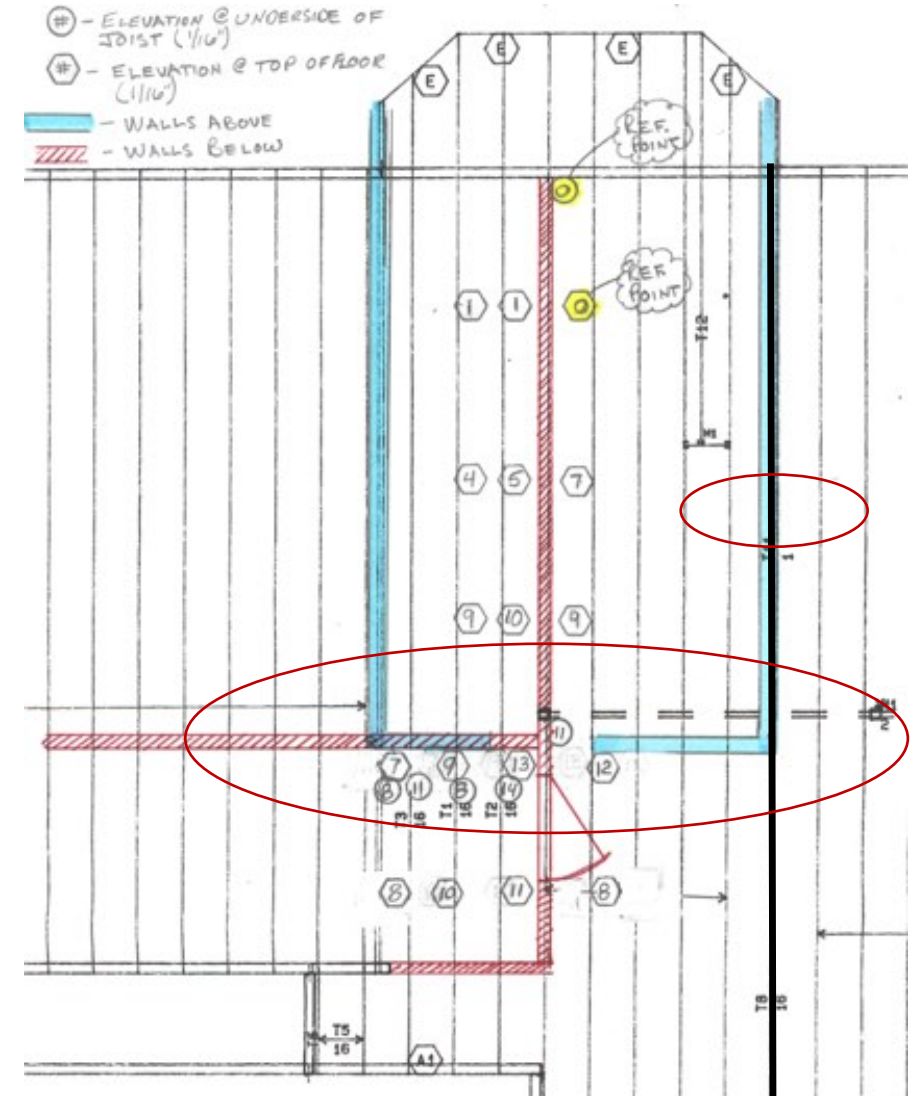

Best Practices - Assumptions Follow-up

EXPECTATIONS OF THE CONTRACTOR

- **OFA Review**
- **Framing for correctness**
- **Notes and deviations**
- **Notes are acceptable unless noted otherwise**

EXPECTATIONS OF THE SUPPLIER

- **Highlight deviations**
- **Load rationalization**
- **Value design – professional protocol**
- **Framing details**

Moisture Management

Simple stated ... keep it dry or use preservative treated wood

Guiding Principles

- Dry Usage is classified as < 16%
- Reasonable construction rainfall is OK
- Service Life - Keep it Dry
- When in doubt – Preservative Treated or Naturally Durable Wood

Dry Use Conditions - “*what to watch for?*”

Balcony/Deck Conditions

- Flashing, connections, detailing, etc. → waterproofing
- Allow for wicking – don’t encapsulate
- Installation Review
- Maintenance Program

Balconies

2018 CBC Requirements

- **CBC Section 107.2.5 – Construction documents must contain:**
 - Details of impervious moisture barrier
 - Installation instructions of barrier
- **CBC Section 110.3.6**
 - Moisture barrier must be inspected
- **CBC Table 1607.1**
 - Design Live Load = 1.5 times
- **CBC Section 2304.12.2.6**
 - Ventilation
- **CBC Section 2304.12.2.5**
 - Drainage





HDH Complex – Frisco, TX
Waterproof Membrane
Perforated Vinyl



Atwood Townhomes, Covina
Waterproof Membrane



Moisture Management



Waterproof Deck Membrane
Alberta, Canada
150° F differential



Waterproof Roof Membrane
Santa Rosa, California
Closed Roof/Floor Cavity

Moisture Management




Condos – La Jolla, CA
Balcony Framing
Moisture Intrusion into the
Building Envelop



Townhome
Open Balcony Framing
Partial Roof Protection?

Moisture Management

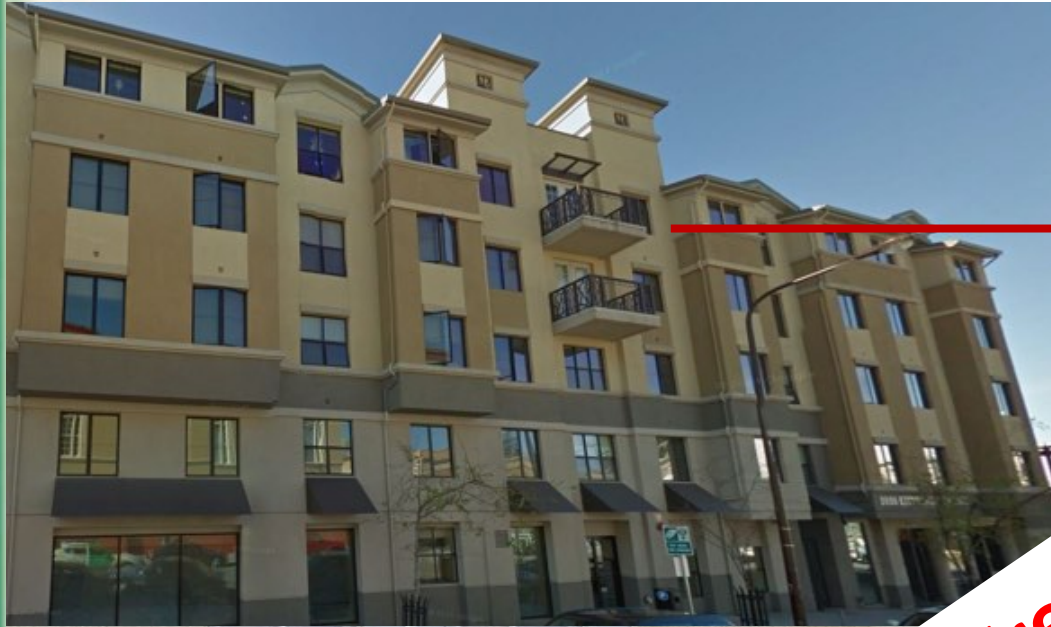

**Berkley, CA
Balcony Deck Collapse
2015**

Moisture Management

Selecting the **Correct** Preservative Treatment

Exposure 4A



Phillip Merrill Center, MD
Exposed Heavy Timber
CuAz Treated



Best Practices - **Moisture Management**

Untreated wood products are intended for dry-use applications only. When used for exterior applications, the construction must maintain dry-use over the entire service life of the structure.

- **Positive drainage**
- **Adequate separation for ventilation/condensation control**
- **Wrap dry products only**

Vibration – Factors Affecting Floor Performance



- **Basic Stiffness** is a combination of joist depths and span.
- **Composite Action**—Careful nailing in conjunction with construction adhesives increases basic stiffness.
- **Continuity**—Continuous joists over several supports generally perform better than simple spans. Care must be taken if the joists continue into another occupancy.
- **Joist Spacing and Deck Stiffness**—Reduced spacing or increased deck thickness generally improves floor performance.
- **Ceilings** directly applied to the bottom edge of the floor members, or equivalent 1x or 2x strapping, is a performance enhancement.
- **Beams**—Floor systems supported by steel or wood beams tend to feel less stiff than those supported by solid bearing walls.
- **Bridging or Blocking** can be a contributor to improved floor performance.
- **Non-bearing Partition Walls** dampen vibration and improve floor performance when installed transverse to the floor joists.
- **Mass** reduces damping in a floor system, causing a decrease in floor performance. This impact is more noticeable as span lengths increase.

Vibration Design

$$f = 1.57 \sqrt{\frac{386EI}{WL^3}}$$

Fundamental Frequency – f (Hz)

E – MOE (psi)

I - moment of inertia (in⁴)

W – true dead load (lbs.)

L - joist span (in)

Virginia Tech Guidelines

Quick Rules of Thumb

Floor covering/floor membranes

Shorten the span

Increase the joist depth



$L/480 +$

Glued/Nailed floor decking

Bridging/Ceiling – tied to a support wall



Fire & Sound Design

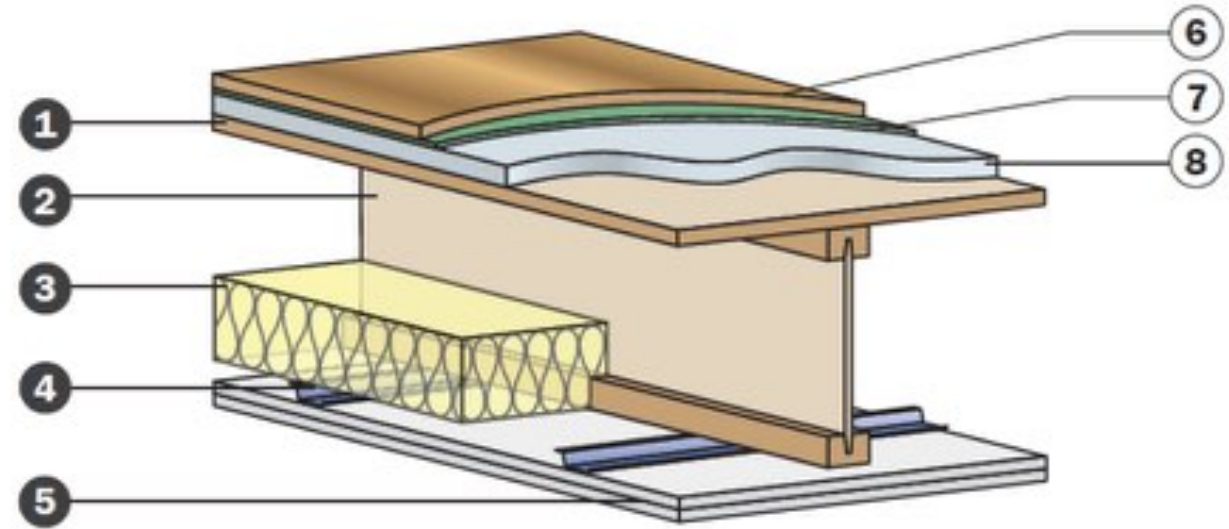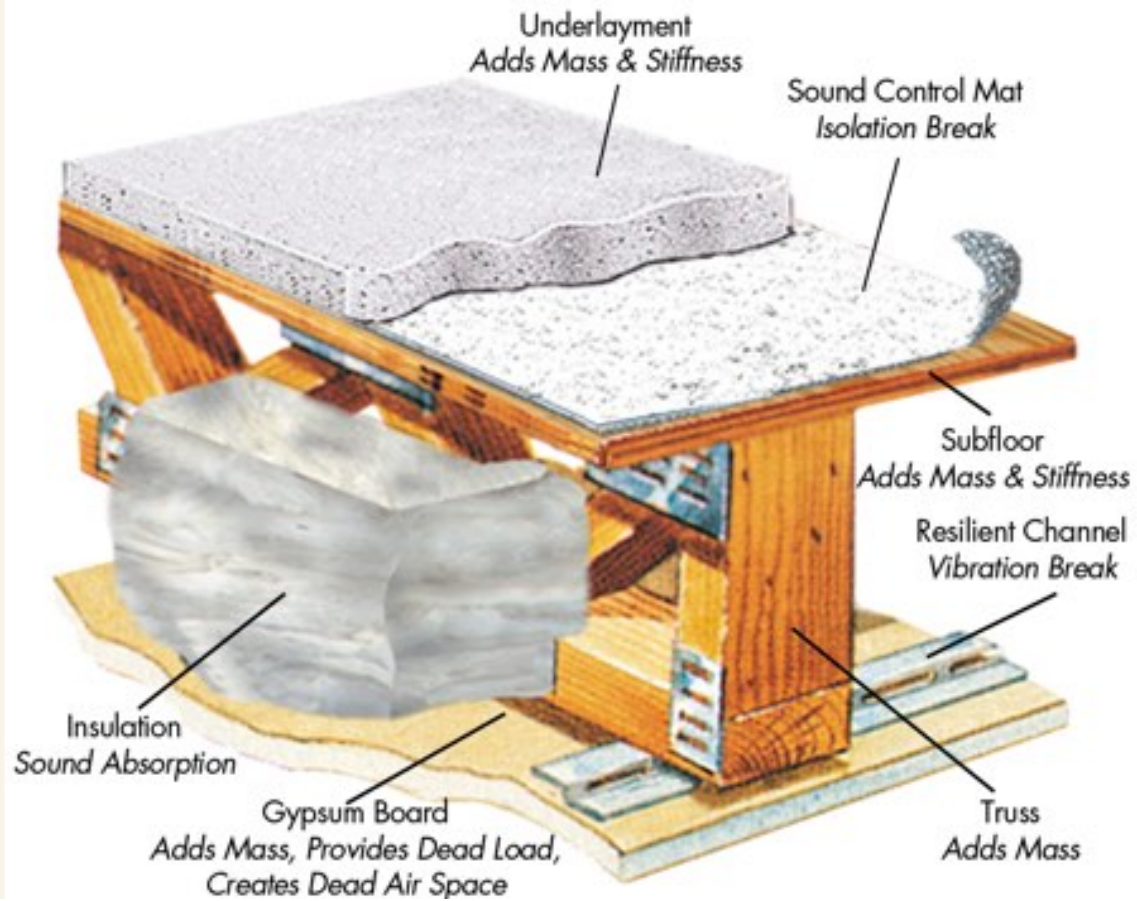

Product Application Assurance

Specification

- Prescribed Code vs 'Preferred' Standards (apartments to condos)
- Full Floor Specification (including varied finished floor coverings)
- Sound Control Mats
- Isolation

Installation

- Matching Specification
- Manufacturer's Recommendation
- Isolation/De-Couple



Fire & Sound Design – Frisco, TX



Field Verification of Specification

Park Place; Fountain Hills, AZ




Fire & Sound Design

**Type 3 Construction Requires FRT Wood Framing
(Type A Flamespread $\neq$ FRTW)**

- **Fire-Retardant-Treated Wood Must be Impregnated with Chemicals
(2018 International Building Code)**
- **FRTW in accordance with ASTM E84 or UL723.**
- **Field Applied Coatings $\neq$ Manufactured FRT Products
Quality Control, plant vs. field environments, etc.)**

Design for
Code Acceptance



**Fire-Resistance-Rated Wood-Frame
Wall and Floor/Ceiling Assemblies**

Two-hour fire-resistance-rated exterior wall assembly, rated for exposure from interior side (and from exterior side as required by IBC 705.5)

FRTW wall framing (studs, plates, blocking, etc.)

Untreated wood rim board, designed to support full wall load (with a minimum thickness of $1\frac{1}{8}$ " if wall is required to be rated from exterior per IBC 705.5)

Untreated wood blocking with minimum thickness of $1\frac{1}{8}$ " (Case A), $1\frac{3}{4}$ " (Case B) or $1\frac{5}{8}$ " (Case C). Blocking must be designed to support full wall load if wall is required to be rated from exterior per IBC 705.5.

FRTW wall framing (studs, plates, blocking, etc.)

FRTW sheathing (as required)

Exterior fire protection (as required to achieve fire-resistance rating per IBC 705.5)

Two-hour fire-resistance-rated exterior wall assembly, rated for exposure from interior side (and from exterior side as required by IBC 705.5)



Untreated wood or other approved material to fill gap between blocking and joist web (if I-joists are used)

One-hour fire-resistance-rated floor / ceiling assembly made with untreated framing members and floor sheathing

Ceiling membrane (as required for one-hour floor assembly):

- Case A: Two layers of min $\frac{5}{8}$ " Type X GWB or equivalent (used in conjunction with min $1\frac{1}{8}$ " blocking)
- Case B: Two layers of min $\frac{1}{2}$ " Type X GWB or equivalent (used in conjunction with min $1\frac{3}{4}$ " blocking)
- Case C: One layer of min $\frac{5}{8}$ " Type X or Type C GWB (used in conjunction with min $1\frac{5}{8}$ " blocking and min $1\frac{1}{2}$ " 2.5 pcf (nominal) mineral wool batt insulation resting on furring or resilient channels)

Type 3 Construction – Rim Board

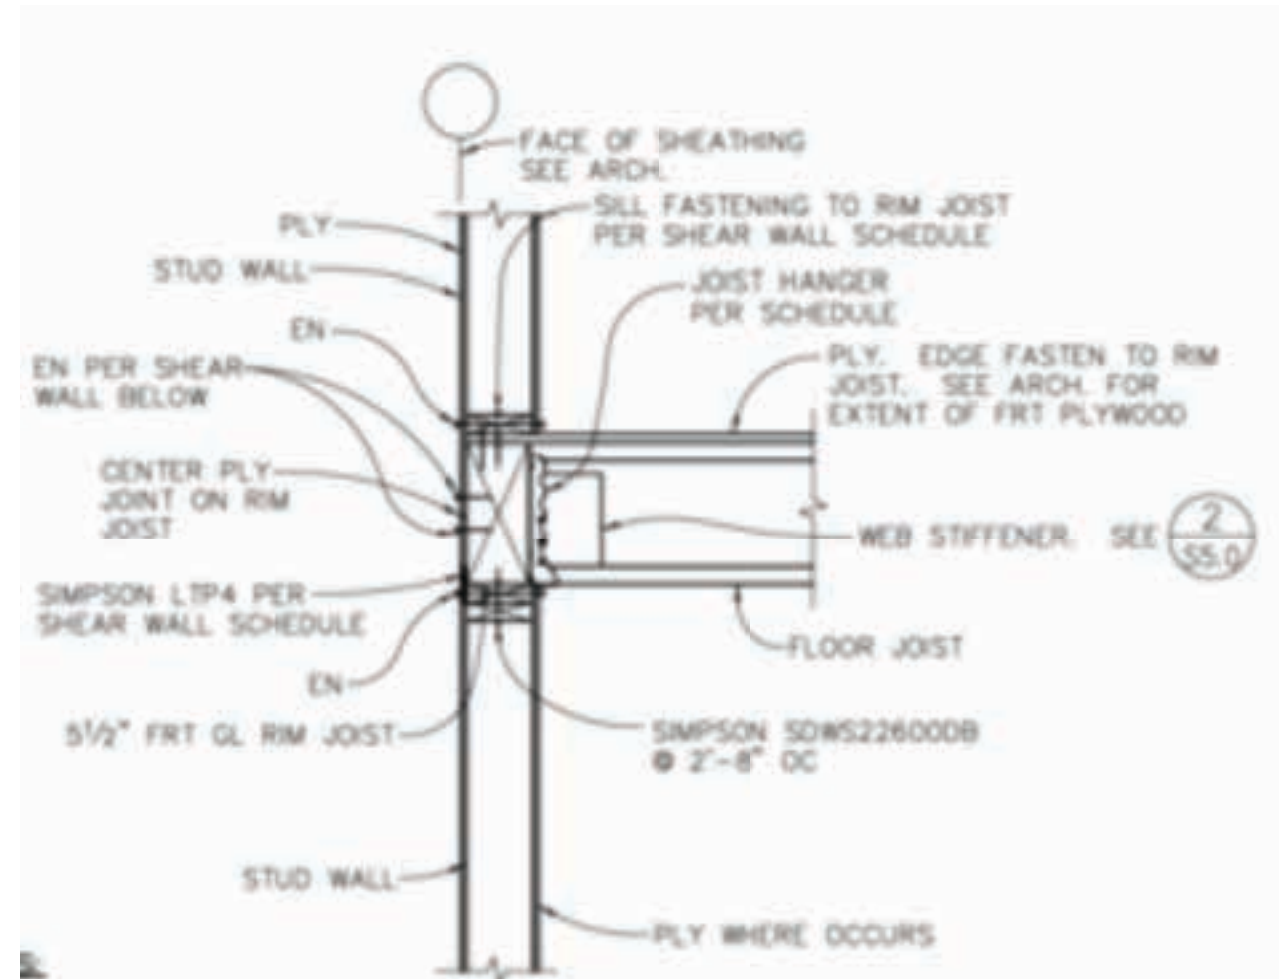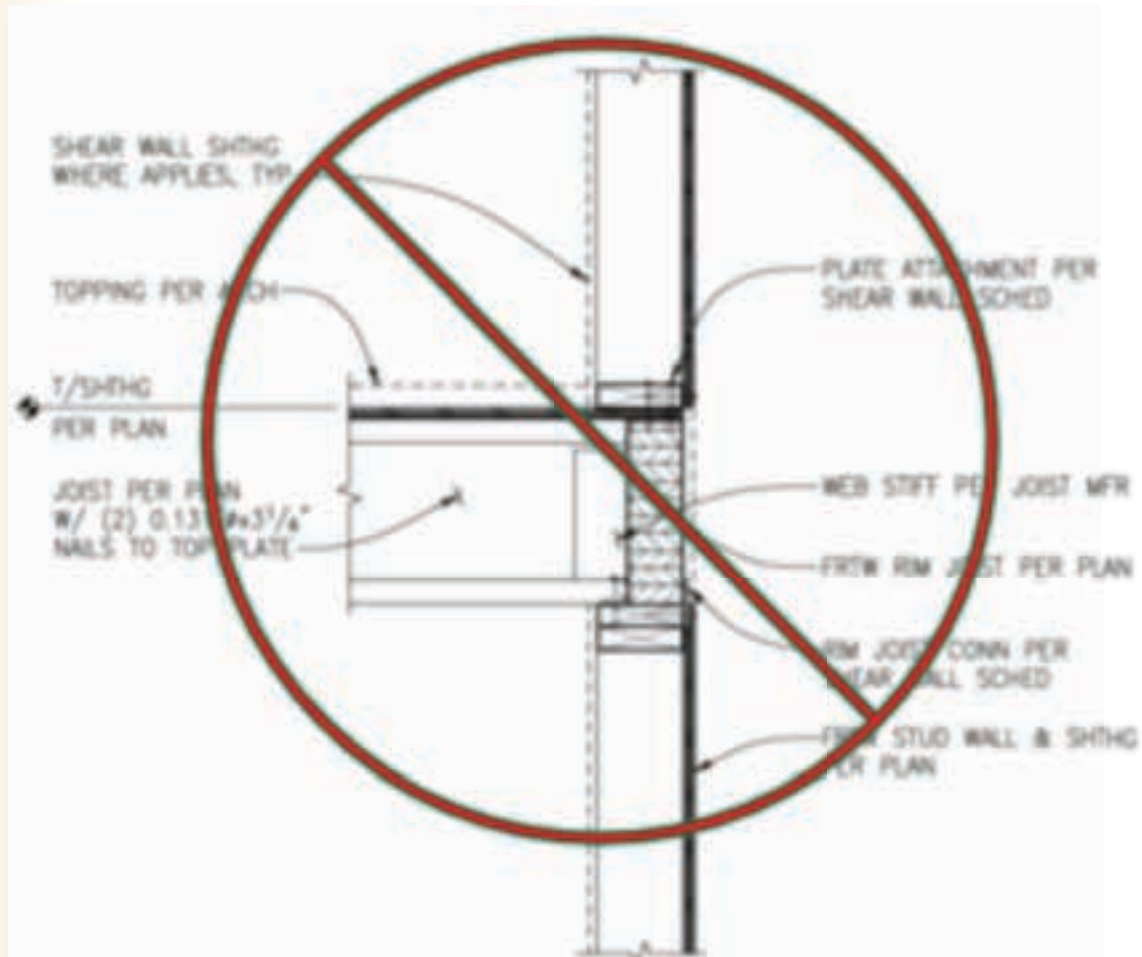

Type 3 Construction Addison, Texas



Code Approved FRTW – Field Issue

Apartment projects in Minneapolis — non-code approved FRT requires replacement (2x6 and 2x8 perimeter framing)



“On Big-D’s watch, lumber that was not approved or code-compliant was used on the Hello Apartments project and Golden Villas will not tolerate actions that create any risk for future tenants,” Golden Villas Chief Manager Traci Tomas said in a news release.

**Professional Protocol
Approval Process**

Roof Anchors

(window wash/maintenance)

- Design by EOR or specialty engineer
- Load can act in any direction
- Requires beams
- Coordination with suppliers/contractors

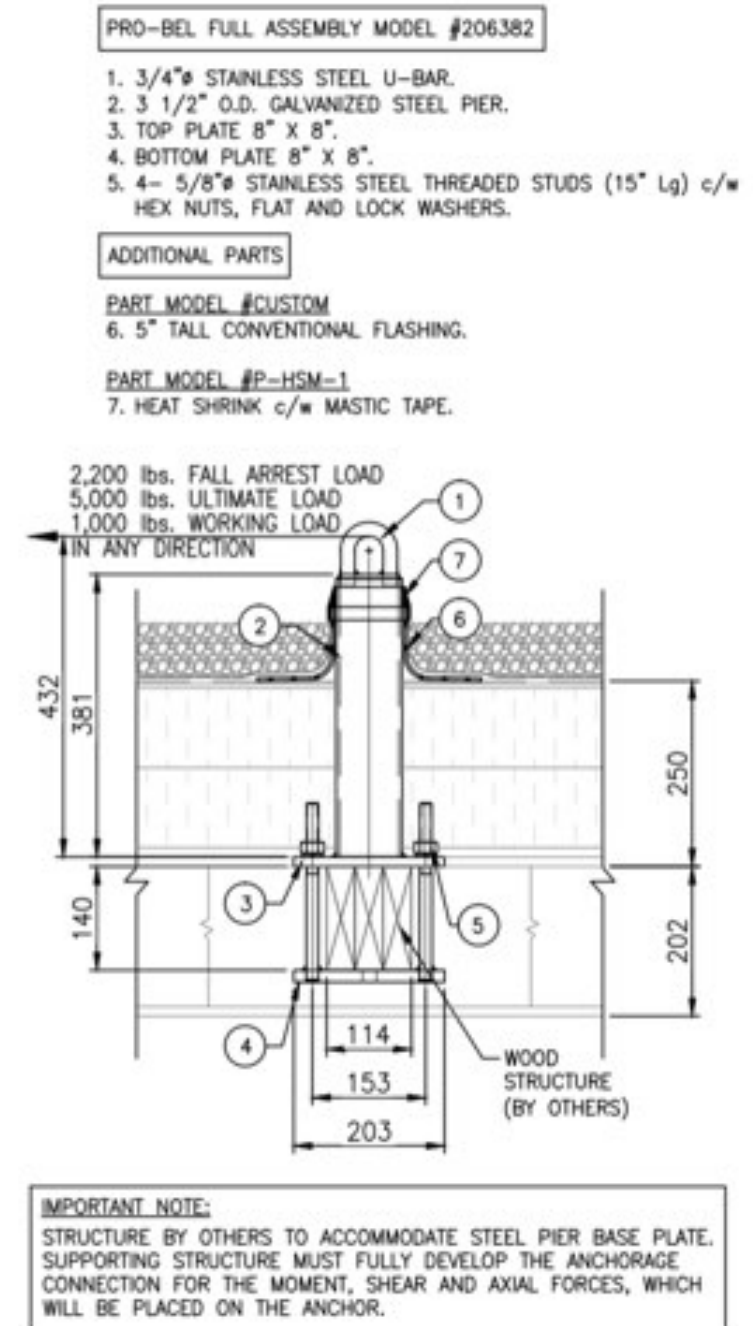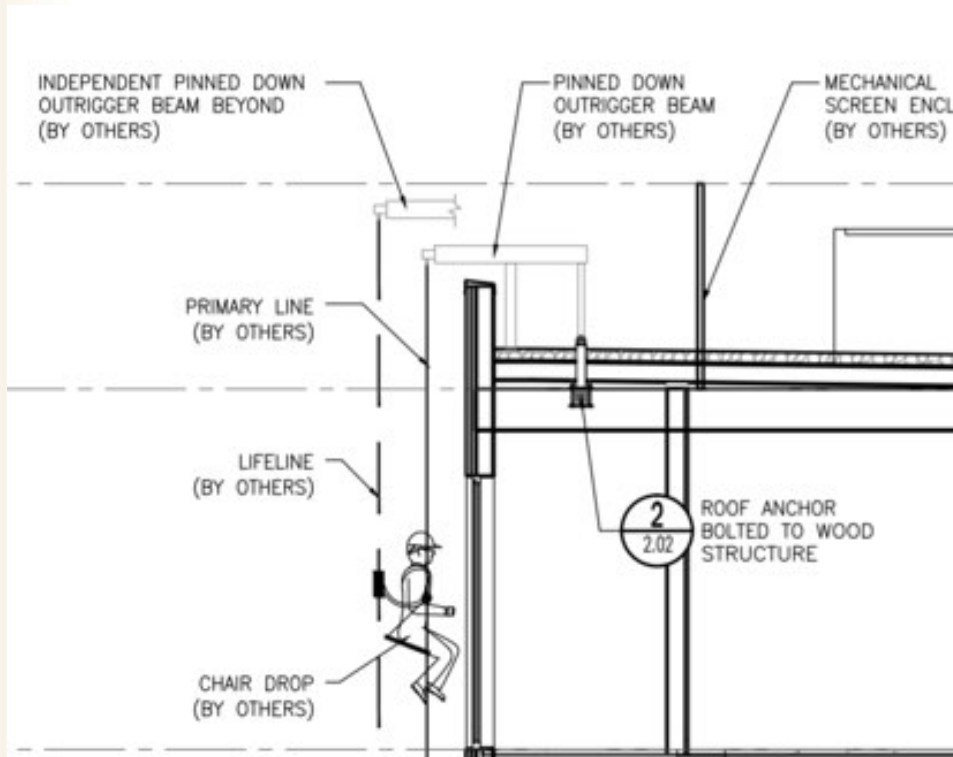


Roof Anchors

Clearly state loads

Solid Blocking

Uplift restraint

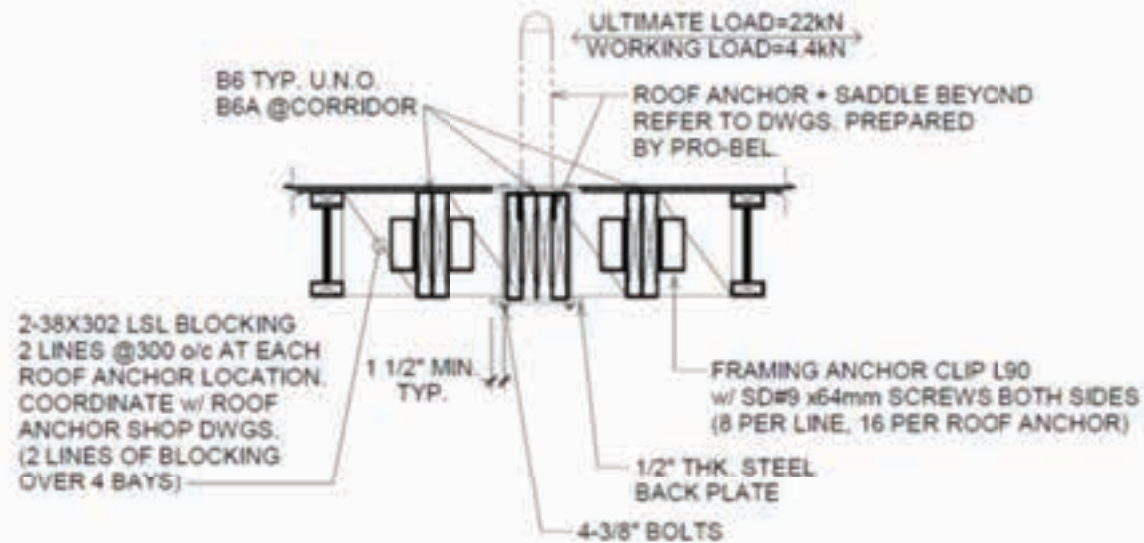

12 TYP. ROOF ANCHOR DETAIL
S800 1:20



Summarizing - My Personal List

“to allow for caution”

- **Tight Construction Timeline (design/modify as you ‘go’) → frequent communications, documentation**
- **Dimensional Issues/Construction Tolerances (field measurement, pre-cut holes/locations, concentrated load alignment) → design and installation review**
- **Floor Covering – Lightweight Concrete Topping, Tile/Stone Cracking → expansion joints, differential deflection, concentrated loads**
- **Manufacturing Defect → urgency for communication and decision making**
- **Installation Issues → inspection, concurrence of architecturals and framing plans**

Summarizing - My Personal List “to allow for caution”

- **Deflection – define client/customer expectations → differential deflection, ‘Non-Load’ bearing walls**
- **Assumptions → Architectural Discrepancies, framing irregularities, professional protocol**
- **Floor Performance → define client/customer expectations; floor system parameters**
- **Moisture Design → Dry Use or correct preservative treatment**
- **Load Tracking → rationalize loads to the foundation**

Questions?

**This concludes The American Institute of Architects
Continuing Education Systems Course**

Thank you for the privilege of your time!

Jose Diaz-Balart - NBC News

Gary Schweizer, PE

Weyerhaeuser

Gary.Schweizer@weyerhaeuser.com